


Suggested Hood and Stack for Down Draft Kilns

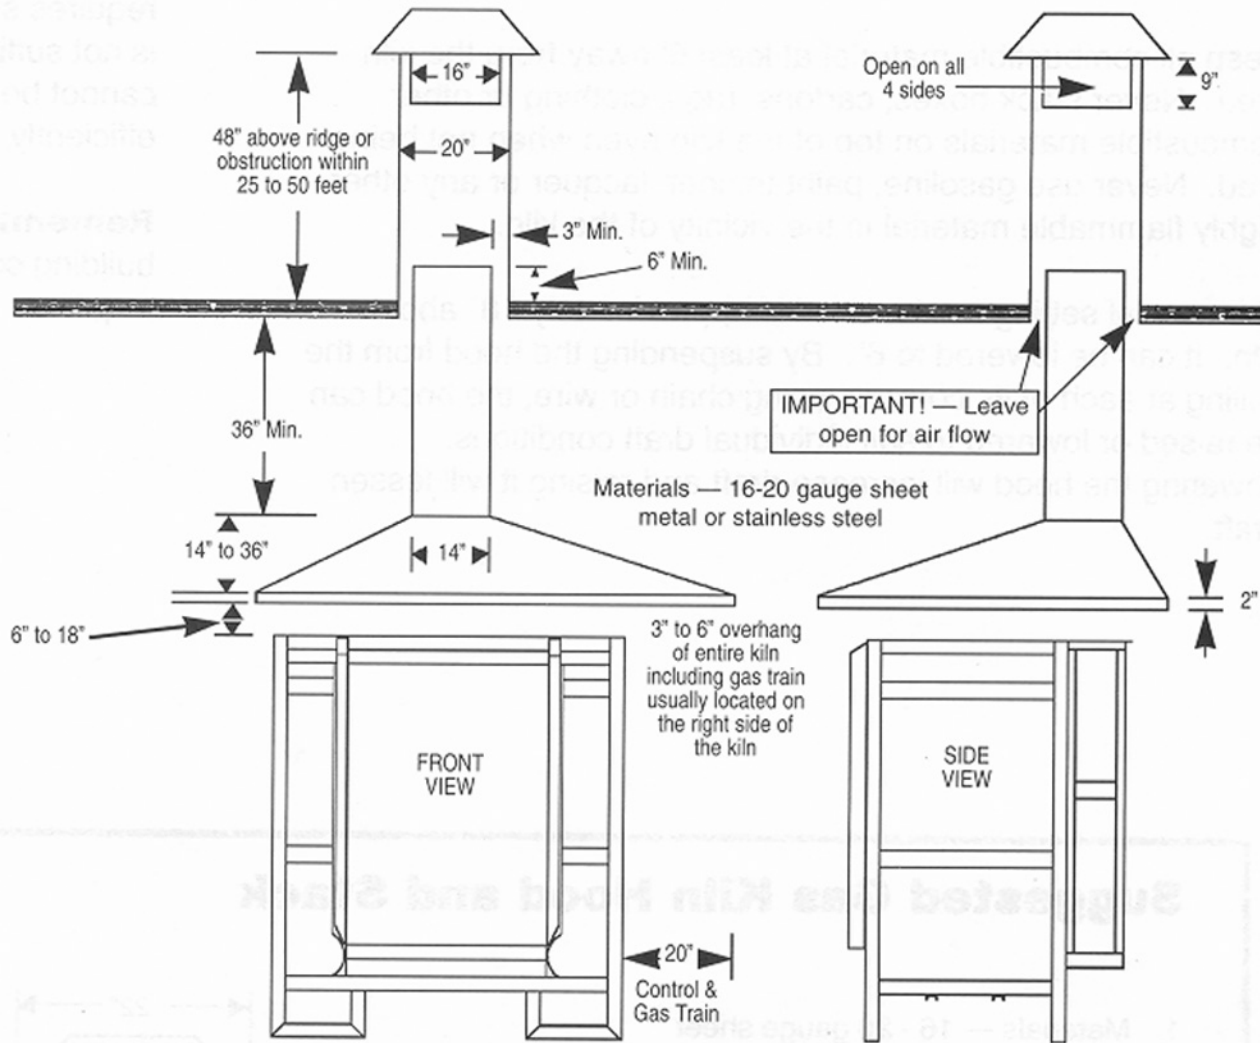

- Due to damper slab location allow 20" clearance behind the back of the kiln.
- Allow 2-2½' clearance all around kiln and leave 3-6' in front of kiln for door swing (depending on size of kiln). A clear four feet around kiln is recommended.
- Check local building codes for conformity before using. We assume no responsibility for improper or illegal venting systems.